

# KM (USB) Switch

## 4 Ports KM Switch with USB 3.2 Gen 1, Mouse Roaming Function, Hotkey Control

Model: KMS-U304

### PRODUCT OVERVIEW

The **USB KM Switch, KMS-U304**, allows users to share one set of keyboard, mouse, audio, and USB peripherals among 4 USB computers. Simply press a button or issue hotkey commands to select your desired PC for access control.




A unique tracking system enables USB devices to be operated independently or concurrently. For example, the USB tracking function allows the KM Switch users to decide whether or not the USB devices (USB flash drive, printer, and scanner) switching follows the PC ports switching. Dedicated USB 3.0 ports are designed on the front and rear sides of the Switch, making it suitable for both ad-hoc and long-term USB peripheral access. This allows users to attach or detach USB devices with ease. It is useful if you want to transfer files from one particular PC while operating another computer. The KM Switch provides real-time USB HID ports for an amazing switching experience, and the USB 3.0 ports offer excellent I/O speed.

The audio function allows KM Switch (USB Switch) users to decide whether audio ports switch along with USB computer ports. This feature is useful if you want to listen to audio signals from one specific audio port while operating another computer.

### Mouse Roaming Functionality with Flexible Preset Screen Layout

Mouse Roaming Functionality: 2 x 2 Video Wall Setup

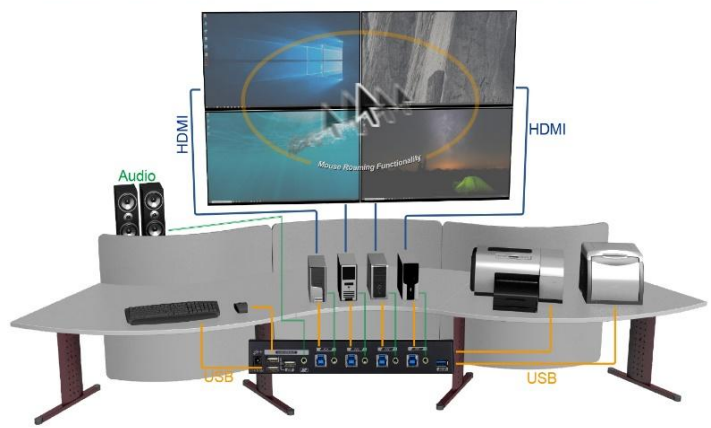

The Mouse Roaming Switching Function allows users to switch among computers by moving the mouse cursor across screen borders, providing a more effective and modern method of computer switching. Users can switch PC ports smoothly and seamlessly by moving the mouse cursor across monitor borders, enabling them to switch


keyboards, mice, audio, and USB devices to another PC without using hotkeys or buttons.

# KM (USB) Switch

## Screen Layouts:

\* Four common 4-screen layout presets are available for 4 x 1, 2 x 2, 1 + 3, and 1 x 4 video wall setups.

\*\* Four 3-screen layout presets options are also available.

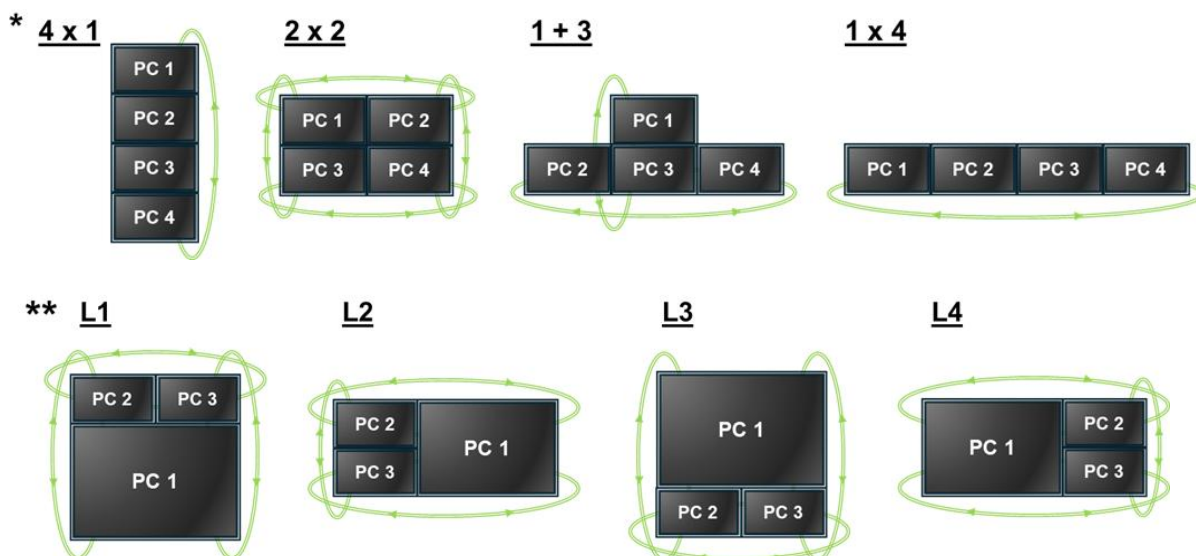

The KM switch with USB Hub supports not only keyboard and mouse operation but also USB 3.0 peripheral sharing. The USB HID ports support Mouse Absolute Coordinate Technology, enabling seamless switching among PCs and adapting to all kinds of mouse resolutions. The 4-Port USB Switch is a compact, pure hardware solution that is plug-and-play, requiring no driver or software installation. It supports most mainstream operating systems, such as Windows, Mac, and Linux. This device reduces redundant cables and promotes a neat working environment.

## KEY FEATURES

- Allows 4 computers to share USB peripherals ( USB HID x 3 + USB 3.2 Gen 1 x 2 )
- Mouse Roaming functionality provides a perfect operation experience by simply moving the mouse cursor across screen border to select the previous/next PC
- 4-Screen Preset Layout options: 4 x 1, 2 x 2, 1 + 3 and 1 x 4.
- 3-Screen Preset Layout options: L1, L2, L3 and L4.
- Supports Keyboard and Mouse Plug-n-Play without Drivers
- Multiple Control Methods enable smooth switching:
  1. Front Panel Push Button Control
  2. Mouse Roaming Control
  3. Hotkey Control

## KM (USB) Switch


- Supports Windows, no software required
- Allows usage of different versions of Windows simultaneously
- Grants access to the full processing power of 4 PCs simultaneously
- Mouse Absolute Coordinate Technology enables seamless switch among PCs and adapts to all kinds of mouse sensitivity

### PRODUCT SPECIFICATIONS

Parameter	Descriptions
Model Name	KMS-U304
Computer/Server Ports (Input)	<ul style="list-style-type: none"> <li>• USB 3.2 Gen 1 (also known as USB 3.0) Type B x 4</li> <li>• 3.5mm Audio In x 4</li> </ul>
Console Ports (Output)	<ul style="list-style-type: none"> <li>• USB 3.2 Gen 1 (also known as USB 3.0) Type A x 2 (1 Front and 1 Rear)</li> <li>• USB HID Type A x 3</li> <li>• 3.5mm Audio Out x 1</li> </ul>
Push Buttons	4 (For Selection)
LED Indicator (Power / Status)	<ul style="list-style-type: none"> <li>• 4 Computer Selected LED, (Red)</li> <li>• 4 Computer Ready LED, (Blue)</li> </ul>
Compatibility	USB 3.2 Gen 1 / USB 2.0 / USB HID
Mouse Roaming	Yes
Keyboard Hotkey	Yes
Power Supply	12V/1.5A DC Power Adapter
Operating Environment	0 ~ 50°C, Humidity < 80%
Storage Temperature	-20 ~ 60°C
Enclosure	Metal
H x W x D (mm)	34 x 220 x 130
Weight (g)	820
Warranty	1-Year Limited Warranty. Advance Replacement Warranty is available and optional.


# KM (USB) Switch

## CONNECTION DIAGRAM

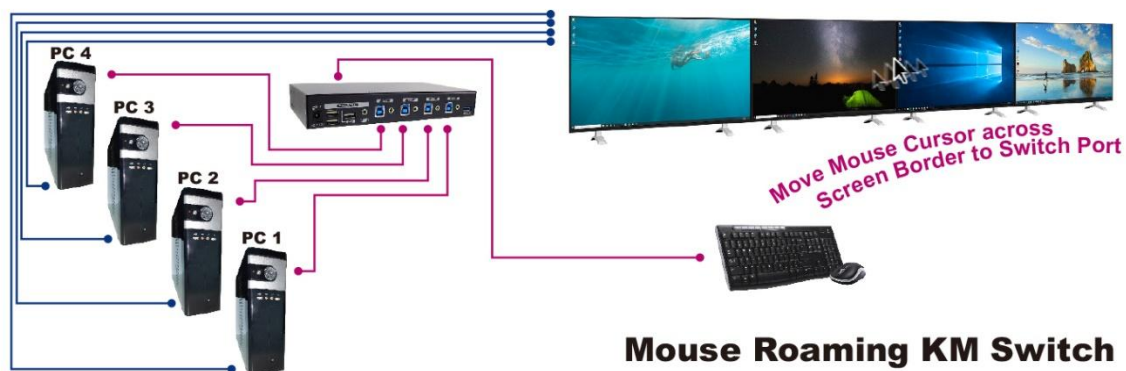

## SCREEN LAYOUT PRESETS AND MOUSE MOVEMENT

### Mouse Roaming KM Switch Screen Layout Presets

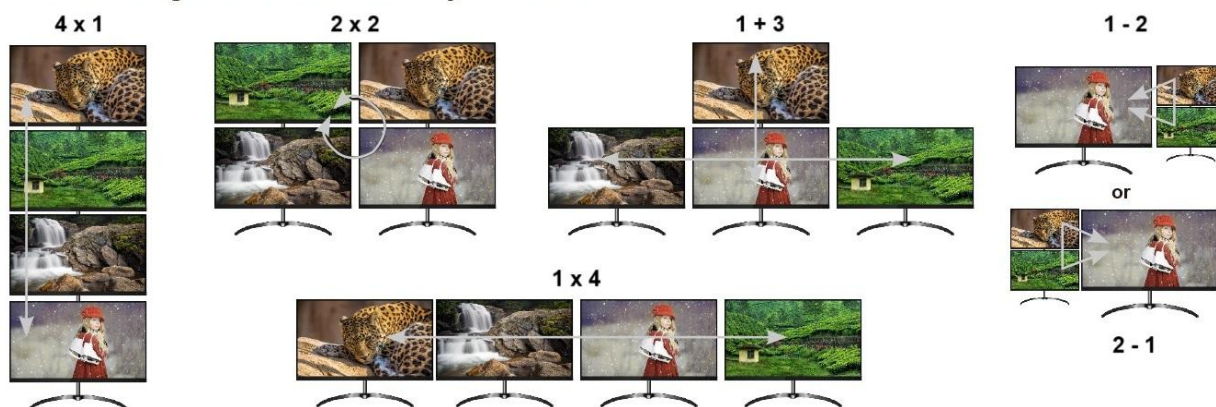

# KM (USB) Switch

## PACKAGE CONTENTS

- 1 × KMS-U304 KM Switch
- 1 × 12V/1.5A DC Power Adapter
- 1 × User Manual
- 1 × Foot Pad Set

## WARRANTY

- Standard 1-Year Limited Warranty, unless otherwise specified by Sales.
- Optional Advance Replacement Warranty is available upon request

## ORDERING INFORMATION

Part Number	Descriptions
<b>KMS-U304</b>	4 Ports KM Switch with USB 3.0, Mouse Roaming Function, Hotkey Control

## CONTACT INFORMATION

For more information, please visit our website or contact our customer service team:

- **Website:** [www.dsgio.com](http://www.dsgio.com)
- **Email:** [sales.apac@dsgio.com](mailto:sales.apac@dsgio.com)

## DISCLAIMER

DSGio shall not be liable for any damages, including punitive, consequential, or cost of cover damages, arising from any errors in the product information or specifications provided in this document. This document is subject to revision by DSGio at any time without prior notice.